



DECLARATION

I, the undersigned, of 11-28, Mizuo 2-chome, Ibaraki-shi, Osaka, Japan, hereby certify that I am well acquainted with the English and Japanese languages, that I am an experienced translator for patent matter, and that the attached document is a true English translation of

Japanese Patent Application No. 11-236792

that was filed in Japanese.

I declare that all statements made herein of my own knowledge are true, that all statements on information and belief are believed to be true, and that these statements were made with the knowledge that willful statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code.

Signature:

Tomoko Nakanishi

Tomoko Nakanishi

Dated: September 24, 2003

RECEIVED
OCT 17 2003
TECHNOLOGY CENTER 2600



[Name of the Document] SPECIFICATION

[Title of the Invention] METHOD OF FABRICATING SEMICONDUCTOR DEVICE

[Claims]

5 [Claim 1] A method of fabricating a semiconductor device, the method comprising the steps of:

(a) forming a silicon oxynitride film on a substrate;

(b) performing a heat treatment, while keeping a surface of the silicon oxynitride film in contact with a gas containing nitrogen, to introduce at least nitrogen into the silicon oxynitride film; and

10 (c) forming a semiconductor film containing an impurity on the silicon oxynitride film.

[Claim 2] The method of claim 1, wherein the silicon oxynitride film is formed by using an N_2O gas in the step (a).

15 [Claim 3] The method of claim 1, wherein the step (c) includes the substeps of: forming, as the semiconductor film, an amorphous silicon film on the silicon oxynitride film;

implanting impurity ions into the amorphous silicon film; and

performing a heat treatment for activating the impurity to change the amorphous film into a polysilicon film.

20 [Claim 4] The method of claim 1, wherein the heat treatment is performed at 800 to 1050°C in the step (b).

[Claim 5] The method of claim 1, wherein a gas containing nitrogen and oxygen is used as the gas containing nitrogen in the step (b).

25 [Claim 6] The method of claim 5, wherein an NO gas is used as the gas containing nitrogen in the step (b).

[Claim 7] The method of claim 5, wherein an N_2O gas is used as the gas containing nitrogen in the step (b).

[Claim 8] The method of any one of claims 1 to 7, wherein
the semiconductor device is a p-channel MIS transistor and
a silicon film for a gate electrode containing boron is formed in the step (c).

[Detailed Description of the Invention]

5 [Technical Field to which the Invention Belongs]

The present invention relates to a MIS transistor having a polysilicon gate electrode provided on a gate insulating film and, more particularly, to an improvement in the driving force thereof.

[Prior Art]

10 Doping of the gate electrode of a MOS transistor with an impurity has been performed conventionally and commonly to reduce the resistance of the gate electrode and thereby improve the driving force of the MOS transistor. In particular, a CMOS device typically has a so-called dual gate structure in which the gate electrode of an n-channel MOS transistor is doped with an n-type impurity (phosphorus or arsenic) and the gate
15 electrode of a p-channel MOS transistor is doped with a p-type impurity (boron).

However, since boron as the p-type impurity is particularly likely to be diffused in an oxide film, a phenomenon of so-called "boron penetration" is observed in which boron passes through the gate oxide film to enter the channel region of a Si substrate, which depletes the gate electrode. This causes the disadvantages of a lower driving force of the
20 p-channel MOS transistor, degraded subthreshold characteristics, and aggravated short-channel effects.

To prevent these disadvantages, there has been used a technique for suppressing downward diffusion of boron by composing the gate insulating film of a silicon oxynitride film. In using the technique, there has commonly adopted a method of forming a silicon
25 oxynitride film directly on a silicon substrate by performing a heat treatment, while allowing a gas mixture of oxygen and NO or an N₂O gas to flow over the silicon substrate, or a method of changing a silicon oxide film already formed into a silicon oxynitride film

by allowing an N_2O gas or NH_3 gas to flow over the silicon oxide film and thereby introducing nitrogen into the silicon oxide film.

[Problems that the Invention is to solve]

However, as the gate length of a transistor becomes shorter with the increasing
5 miniaturization and higher integration of a CMOS device currently pursued, a gate insulating film is also reduced in thickness to provide a sufficient driving force despite a reduction in voltage, which has caused the problem that a transistor with a sufficient driving force is not provided even if the gate insulating film is composed of a silicon oxynitride film.

10 Although the cause thereof has not been determined yet with certainty, the present inventors have experimentally assumed that an insufficient driving force is attributable to a mechanism other than the depletion of a gate electrode and, in particular, to a poor state of nitrogen distribution in the silicon oxynitride film as the gate insulating film.

It is therefore an object of the present invention to provide a method of fabricating a
15 semiconductor device with a large driving force, such as a MIS transistor, while suppressing downward penetration of an impurity from a gate insulating film of the MIS transistor having a gate electrode doped with the impurity.

[Means of Solving the Problems]

A method of fabricating a semiconductor device according to the present invention
20 comprises the steps of: (a) forming a silicon oxynitride film on a substrate; (b) performing a heat treatment, while keeping a surface of the silicon oxynitride film in contact with a gas containing nitrogen, to introduce at least nitrogen into the silicon oxynitride film; and (c) forming a semiconductor film containing an impurity on the silicon oxynitride film.

In accordance with the method, nitrogen can be introduced additionally such that a
25 nitrogen distribution having a steeply sloped configuration is produced in the silicon oxynitride film. This suppresses the entrance of nitrogen into the semiconductor film and the substrate, while suppressing the penetration of the impurity from the semiconductor

film into the substrate. This allows a device formed by using the semiconductor film and the silicon nitride film to retain excellent characteristics. In a MIS transistor, e.g., a reduction in driving force assumedly caused by the penetration of nitrogen into the gate electrode or the semiconductor substrate can be suppressed, while the penetration of the impurity from the gate electrode composed of the semiconductor film into the semiconductor substrate is suppressed. In summary, the suppression of the short-channel effects resulting from the penetration of the impurity is achievable simultaneously with an improvement in the driving force of the transistor.

In the method of fabricating a semiconductor device, the silicon oxynitride film is preferably formed by using an N_2O gas in the step (a).

In the method of fabricating a semiconductor device, the step (c) preferably includes the substeps of: forming, as the semiconductor film, an amorphous silicon film on the silicon oxynitride film; implanting impurity ions into the amorphous silicon film; and performing a heat treatment for activating the impurity to change the amorphous film into a polysilicon film. This suppresses the penetration of the impurity into the substrate underlying the silicon oxynitride film by using a high impurity holding capability of the amorphous silicon film.

In the method of fabricating a semiconductor device, the heat treatment is preferably performed at 800 to 1050 °C in the step (b).

In the method of fabricating a semiconductor device, a gas containing nitrogen and oxygen is preferably used as the gas containing nitrogen in the step (b).

In that case, it was found that a particularly large effect was achievable by using an NO gas as the gas containing nitrogen.

Alternatively, an N_2O gas can also be used as the gas containing nitrogen.

In the method of fabricating a semiconductor device, if the semiconductor device is a p-channel MIS transistor, a MIS transistor having a high driving force suitable for a CMIS device with a dual gate structure is obtainable by forming a gate electrode containing boron

in the step (c).

[Embodiments of the Invention]

Figures 1(a) to (e) and Figures 2(a) to (c) are cross-sectional views illustrating the process of fabricating a semiconductor device (CMOS device) according to an embodiment of the present invention. Throughout the drawings, Rp denotes a region in which a p-channel MIS transistor is to be formed and Rn denotes a region in which an n-channel MIS transistor is to be formed.

In the step shown in Figure 1(a), trench isolation regions 11 surrounding the p-channel MIS transistor formation region Rp and the n-channel MIS transistor formation region Rn are formed in a Si substrate 10. Then, the Si substrate 10 is kept in contact with an N₂O gas at a temperature of about 1000 °C for about 60 sec, whereby a silicon oxynitride film 12 with a thickness of 2.8 nm is formed on the substrate 10.

It is to be noted that the method of forming the silicon oxynitride film is not limited thereto. For example, it is also possible to perform a heat treatment at about 1000 °C, while keeping the surface of the Si substrate 10 in contact with a gas mixture of an NO gas and an O₂ gas. Alternatively, it is also possible to form a silicon oxide film and introduce nitrogen into a surface of the silicon oxide film.

Next, in the step shown in Figure 1(b), nitrogen (N) is introduced into the interior of the silicon oxynitride film 12 by performing a heat treatment at 900 °C for 30 sec, while keeping the silicon oxynitride film 12 in contact with an NO gas. As a consequence, the state of nitrogen distribution in the silicon oxynitride film 12 changes such that not only nitrogen concentration in the silicon oxynitride film 12 increases but also a peak portion at which nitrogen concentration is maximum exists at a center portion in the direction of thickness of the silicon oxynitride film 12 and the distribution of nitrogen exhibits a steeply sloped configuration.

Next, in the step shown in Figure 1(c), a semiconductor film 13 for gate electrode composed of an amorphous silicon film is deposited on the silicon oxynitride film 12.

Next, in the step shown in Figure 1(d), a photoresist film 21 covering the n-channel MIS transistor formation region Rn is formed on the semiconductor film 13 for gate electrode. By using the photoresist film 21 as a mask, boron ions (B^+) are implanted into the semiconductor film 13 for gate electrode at an implant energy of 5 keV and a dose of $5 \times 10^{15}/\text{cm}^2$, thereby changing, into the p type, the portion of the semiconductor film 13 for gate electrode located in the p-channel MIS transistor formation region Rp.

Next, in the step shown in Figure 1(e), the photoresist film 21 is removed. Then, a photoresist film 22 covering the p-channel MIS transistor formation region Rp is formed on the semiconductor film 13 for gate electrode. By using the photoresist film 22 as a mask, phosphorus ions (P^+) are implanted into the semiconductor film 13 for gate electrode at an implant energy of 10 keV and a dose of $7 \times 10^{15}/\text{cm}^2$, thereby changing, into the n type, the portion of the semiconductor film 13 for gate electrode located in the n-channel MIS transistor formation region Rn.

Next, in the step shown in Figure 2(a), a silicon nitride film with a thickness of about 150 nm is deposited on the semiconductor film 13 for gate electrode. The silicon nitride film and the polysilicon film are patterned by photolithography and dry etching, thereby forming gate electrodes 13a and 13b and on-gate protective layers 14a and 14b in the p-channel MIS transistor formation region Rp and in the n-channel MIS transistor formation region Rn, respectively. By using the gate electrodes 13a and 13b and the on-gate protective layers 14a and 14b as a mask, boron as a low-concentration p-type impurity is ion implanted into the p-channel MIS transistor formation region Rp, while arsenic as a low-concentration n-type impurity is ion implanted into the n-channel MIS transistor formation region Rn, whereby low-concentration source/drain regions (or extension regions) 20a and 20b are formed in the Si substrate 10.

Next, in the step shown in Figure 2(b), a silicon oxide film 15 with a thickness of about 15 nm and a silicon nitride film 16 with a thickness of about 55 nm are deposited successively.

Next, in the step shown in Figure 2(c), anisotropic etching is performed with respect to the silicon nitride film **16** and the silicon oxide film **15**, thereby forming oxide film sidewalls **15a** and **15b** each having an L-shaped cross section on respective side surfaces of the gate electrodes **13a** and **13b** and of the on-gate protective layers **14a** and **14b** and forming nitride film sidewalls **16a** and **16b** covering the side and bottom surfaces of the oxide film sidewalls **15a** and **15b**. During the anisotropic etching, the silicon oxynitride film **12** is also patterned to form gate insulating films **12a** and **12b** made of a silicon oxynitride under the gate electrodes **13a** and **13b** and the like.

Thereafter, by using the gate electrodes **13a** and **13b**, the on-gate protective layers **14a** and **14b**, the oxide film sidewalls **15a** and **15b**, and the nitride film sidewalls **16a** and **16b** as a mask, high-concentration boron is ion implanted into the portion of the Si substrate **10** located in the p-channel MIS transistor formation region R_p and high-concentration arsenic is ion implanted into the portion of the Si substrate **10** located in the n-channel MIS transistor formation region R_n , whereby high-concentration source/drain regions **21a** and **21b** are formed. Subsequently, a heat treatment (RTA) is performed at 1000 °C for 10 sec to activate the impurities in the low-concentration source/drain regions **20a** and **20b** and in the high-concentration source/drain regions **21a** and **21b**.

By the foregoing process, there is formed a CMOS device with a so-called dual gate structure in which the conductivity types of the respective impurities contained in the gate electrodes **13a** and **13b** are coincident with those of the respective channels of the transistors.

Although the depiction of the subsequent fabrication process is omitted, an interlayer insulating film is deposited over the substrate and planarized, contact holes reaching the high-concentration source/drain regions are formed in the interlayer insulating film, and a metal such as W or Al is buried in the contact holes to form metal plugs. A wiring layer is further formed thereon and, if necessary, a multilayer wiring structure is formed by

repeating the formation of the interlayer insulating film, the metal plugs, and the wiring layer.

When the heat treatment at a temperature exceeding about 600 °C is performed after the steps shown in Figures 1(d) and (e), each of the gate electrodes 13a and 13b (semiconductor film 13 for gate electrode) changes from the amorphous silicon film to the polysilicon film. If the heat treatment for impurity activation is performed immediately after the completion of the step shown in Figure 1(e), a change from the amorphous silicon film to the polysilicon film occurs. Even if the heat treatment for impurity activation is not performed, there are cases where the change from the amorphous silicon film to the polysilicon film is caused by a CVD process for depositing the silicon oxide film 15 and the silicon nitride film 16 shown in Figure 2(b) or by the heat treatment for impurity activation in the step shown in Figure 2(c).

The method of fabricating a semiconductor device according to the present invention is characterized in that annealing (heat treatment) is performed by keeping the silicon oxynitride film 12 in contact with the NO gas in the step shown in Figure 1(b). It has been found that the treatment increases the nitrogen concentration in the silicon oxynitride film 12 and provides the nitrogen distribution in a steeply sloped configuration. The profile of the nitrogen concentration will be described later. As a result of conducting evaluation, the present inventors have found that such an NO gas annealing process provides the following characteristics which are different from the characteristics of the conventional p-channel MIS transistor.

Figure 3(a) shows the short-channel characteristics of a conventional p-channel MIS transistor and Figure 3(b) shows the short-channel characteristics of the p-channel MIS transistor according to the present embodiment. The conventional p-channel MIS transistor has the structure shown in Figure 2(c) in which a silicon oxynitride film that has not been subjected to gas annealing is used as a gate insulating film. In each of Figures 3(a) and (b), the horizontal axis represents a gate length (μm) and the vertical axis

represents a threshold voltage (V). The numerals shown in the upper left portions of the Figures 3(a) and (b) indicate the dose of ions implanted in the channel region (i.e., the dose of ions implanted for threshold control). For example, “4e12” indicates that the dose of the implanted ions is “ $4 \times 10^{12}/\text{cm}^2$ ”.

From the comparison between Figures 3(a) and (b), it will be understood that the threshold voltage of the p-channel MIS transistor according to the present embodiment is barely reduced compared with that of the conventional p-channel MIS transistor provided that the gate lengths thereof are the same. This may be because the threshold voltage of the conventional p-channel MIS transistor is reduced by the penetration of boron from the gate electrode into the substrate. By contrast, boron penetration is suppressed effectively in the p-channel MIS transistor according to the present embodiment.

Figure 4(a) shows the Ion-Ioff characteristics of the conventional p-channel MIS transistor and Figure 4(b) shows the Ion-Ioff characteristics of the p-channel MIS transistor according to the present embodiment. The conventional p-channel MIS transistor has the structure shown in Figure 2(c) in which the silicon oxynitride film that has not been subjected to gas annealing is used as the gate insulating film. In each of Figures 4(a) and (b), the horizontal axis represents an on-state current I_{on} ($\mu\text{A}/\mu\text{m}$) and the vertical axis represents an off-state leakage current I_{off} ($\text{A}/\mu\text{m}$). Each of I_{on} and I_{off} indicates a source-to-drain current. The numerals, such as “4e12”, shown in the upper left portions indicate the same as described above.

As shown in Figure 4(a), if the threshold voltage of the p-channel MIS transistor with the conventional structure is adjusted such that the off-state leakage current I_{off} is $1\text{ nA}/\mu\text{m}$ (per unit gate width) when the concentration of the impurity for threshold control is varied, the on-state current I_{on} is about $100\text{ }(\mu\text{A}/\mu\text{m})$ (see the arrow in Figure 4(a)). On the other hand, if the threshold voltage of the p-channel MIS transistor according to the present embodiment is adjusted such that the off-state leakage current I_{off} is $1\text{ nA}/\mu\text{m}$ (per unit gate width) when the concentration of the impurity for threshold control is varied,

the on-state current I_{on} is about $250 (\mu A/\mu m)$ (see the arrow in Figure 4(b)). In summary, the p-channel MIS transistor according to the present embodiment has higher on-off characteristics and a larger driving force.

Figure 5 shows the respective subthreshold characteristics (V_g - I_d characteristics) of the conventional p-channel MIS transistor and the p-channel MIS transistor according to the present embodiment. The conventional p-channel MIS transistor has the structure shown in Figure 2(c) in which the silicon oxynitride film that has not been subjected to gas annealing is used as the gate insulating film. In Figure 5, the horizontal axis represents a gate voltage V_g (V) and the vertical axis represents a drain current I_d (A).

As can be seen from Figure 5, the p-channel MIS transistor according to the present embodiment has a smaller off-state leakage current and a V_g - I_d characteristic curve with sharper inclination. From the results of the experiments, it will be understood that the p-channel MIS transistor according to the present embodiment has superior on-off characteristics.

Figure 6 shows the respective transconductance characteristics (G_m - V_g characteristics) of the conventional p-channel MIS transistor and the p-channel MIS transistor of the present embodiment. The conventional p-channel MIS transistor has the structure shown in Figure 2(c) in which the silicon oxynitride film that has not been subjected to gas annealing is used as the gate insulating film. In Figure 6, the horizontal axis represents a gate voltage V_g (V) and the vertical axis represents a transconductance G_m (S).

As can be seen from Figure 6, the p-channel MIS transistor according to the present embodiment has transconductance with a larger maximum value, i.e., superior switching properties.

A consideration will be given to the reason that the driving force of the p-channel MIS transistor is improved by the fabrication method according to the present embodiment.

A conventional silicon oxynitride film is formed by the same treatment as performed in the step shown in Figure 1(a). That is, the conventional silicon oxynitride film is formed by, e.g., performing a heat treatment at a temperature of about 1000 °C, while keeping a Si substrate in contact with a gas mixture of NO and O₂ (or an N₂O gas) or by
5 performing a heat treatment (RTA) at a temperature of about 1000 °C, while keeping a silicon oxide film in contact with N₂ or NH₃. However, it has been found that, if the silicon oxynitride film formed by such a treatment is used as a gate insulating film that has been reduced particularly in thickness in recent years, the driving force of a p-channel MIS transistor is reduced disadvantageously.

10 Although the cause thereof has not been determined yet with certainty, it is assumed to be the scattering of carriers caused by an interface state density due to excess nitrogen atoms present at an interface immediately overlying a channel region, an increase in dangling voids resulting from the breakage of bonds in a silicon oxide film by nitrogen atoms, or an increase in gate resistance due to excess nitrogen atoms present in a gate
15 electrode.

If the amount of nitrogen introduced into the silicon oxide film is reduced, the penetration of boron from the gate electrode into the channel region cannot be prevented reliably, so that the gate electrode is depleted to reduce the driving force or aggravate short-channel effects including a reduction in threshold voltage. Thus, it is difficult to
20 simultaneously achieve an improvement in the driving force of the transistor and the suppression of the short-channel effects so that, under present circumstances, a trade-off therebetween is determined individually for a CMOS device depending on the type thereof.

However, the present inventors found experimentally that, if the heat treatment was performed while the surface of the silicon oxynitride film was exposed to the NO gas (NO
25 gas annealing), the suppression of the short-channel effects was achievable simultaneously with improvements in the driving force of the transistor (including an improvement in on-off characteristics and an improvement in transconductance). The present inventors

further examined changes that had been caused by the NO gas annealing in distributions of nitrogen concentration in the individual portions of the transistor.

Figures 7 and 8 shows the results of measuring, by SIMS, the distributions of nitrogen concentration (atoms/cm³) in the silicon oxynitride films and their vicinities according to Example and Comparative Examples. In Figure 7, the horizontal axis represents the direction of depth in cross section and the vertical axis represents nitrogen concentration (on a logarithmic scale). Figure 8 shows the same data as shown in Figure 7 by using a linear scale to express the concentration which is represented by the vertical axis. In each of the drawings, ①, ②, ③, ⑤, and ⑦ indicate samples prepared by the following treatments in each of which amorphous silicon is deposited on a silicon oxynitride film with a thickness of 2.6 nm.

① : Comparative Example 1

The sample was prepared by performing a heat treatment at 1000 °C, while keeping a surface of a Si substrate as an underlie in contact with an N₂O gas, and thereby oxynitriding silicon to form an oxynitride film (the conventional p-channel MOS transistor in a mid-step of the fabrication process from which the data shown in Figures 4(a) and Figures 5 and 6 was obtained).

②: Comparative Example 2

The sample was prepared by performing a heat treatment at 1000 °C, while keeping a surface of a Si substrate as an underlie in contact with an N₂O gas, thereby oxynitriding silicon to form an oxynitride film (prepared by further performing a heat treatment at 800 °C, while keeping a surface of the sample of Comparative Example 1 in contact with an NO gas (NO gas annealing)).

③: Example

The sample was prepared by performing a heat treatment at 1000 °C, while keeping a surface of a Si substrate as an underlie in contact with an N₂O gas, thereby oxynitriding silicon to form an oxynitride film (prepared by further performing a heat treatment at

900 °C, while keeping a surface of the sample of Comparative Example 1 in contact with an NO gas (NO gas annealing)).

⑤ : Comparative Example 3

The sample was prepared by performing a heat treatment, while keeping a surface of a Si substrate as an underlie in contact with a gas mixture of O₂ and NO (containing 30% of NO gas), and thereby oxynitriding silicon to form an oxynitride film.

⑦ : Comparative Example 4

The sample was prepared by performing a heat treatment, while keeping a surface of a Si substrate as an underlie in contact with a gas mixture of O₂ and NO (containing 10% of NO), and thereby oxynitriding silicon to form an oxynitride film.

In each of Figures 7 and 8, “a-Si” indicates an amorphous silicon film, “SiON” indicates a silicon oxynitride film, and “Si-sub” indicates a Si substrate. The two broken lines in each of the drawings represents the interface between the amorphous silicon film and the silicon oxynitride film and the interface between the silicon oxynitride film and the Si substrate.

As shown in Figure 8, the nitrogen concentration in the sample ①, which was the conventional silicon oxynitride film prepared in Comparative Example 1, has a peak at a point close to the interface between the silicon oxynitride film and the Si substrate. Since the distribution of nitrogen concentration presents a gently sloped configuration, if the impurity concentration is increased to such a degree as to prevent the penetration of the impurity, the nitrogen concentration in the amorphous silicon film and in the Si substrate is expected to be higher.

By contrast, the nitrogen concentration in the sample ③ prepared in Example in accordance with the method of the present embodiment has a peak value at a point located adjacent the middle portion of the silicon oxynitride film and the distribution of nitrogen concentration presents a steeply sloped configuration. The nitrogen concentration in the silicon oxynitride film of the sample ③ of Example is about 8 atom%. It has also been

proved that, if the peak of the nitrogen concentration in the silicon oxynitride film has a value on the order of the peak value in the sample ③ of Example shown in Figure 8, the penetration of boron can be prevented. If the nitrogen concentration is excessively higher than 8 atom%, the transistor characteristics may be adversely affected.

5 If NO gas annealing is performed at 800 °C as in the sample ② of Comparative Example 2, the peak of the nitrogen concentration remains at a point adjacent the interface between the silicon oxynitride film and the Si substrate, so that the configuration of the distribution is not steeply sloped, either. As a result of forming a MIS transistor from the sample of Comparative Example 2, it was found that the driving force was lower than that
10 of a MIS transistor formed from the sample ③ of Example.

When the temperature for performing NO gas annealing with respect to a silicon oxynitride film was set to 1000 °C, though the data obtained at that temperature is not shown in Figures 7 and 8, it was found that the configuration of the distribution is more steeply sloped than in the sample ① of Example and characteristics associated with the
15 short-channel effects, driving force, and the like of the MIS transistor were excellent.

In the case of forming a silicon oxynitride film directly from a Si substrate by using a gas mixture of O₂ and NO containing NO in a high proportion, as in the sample ⑤ of Comparative Example 3, the peak of the nitrogen concentration is located at a nearly middle portion in the direction of thickness of the silicon oxynitride film but the nitrogen
20 concentration is higher in a portion closer to the amorphous silicon film. As a result of forming a MIS transistor from the sample ⑤ of Comparative Example 3, it was found that the driving force was lower than that of a MIS transistor formed from the sample ③ of Example.

From the foregoing results, it can be considered that, by performing the NO gas
25 annealing of the present invention with respect to a silicon oxynitride film, the nitrogen concentration is distributed into a steeply sloped configuration such that nitrogen exists at a high concentration in the silicon oxynitride film, which suppresses the penetration of boron

into the Si substrate **10** and provides a high driving force.

In the conventional step of forming a silicon oxynitride film, the silicon oxynitride film is formed directly from the silicon substrate or by nitriding the silicon oxide film. In accordance with the conventional method, however, the distribution of nitrogen
5 concentration in the silicon oxynitride film has a gently sloped configuration. Since nitrogen is distributed continuously not only in the silicon oxynitride film but also in the gate electrodes (amorphous silicon film) on both sides and in the Si substrate, the gently sloped distribution of nitrogen concentration leads to the entrance of nitrogen at a relatively high concentration into the gate electrodes and also into the Si substrate if
10 nitrogen at a concentration required to suppress boron penetration is to be contained in the silicon oxynitride film. As a result, the driving force of the transistor is assumedly reduced by an increase in gate resistance in the gate electrodes or by a reduction in the mobility of carriers in the channel region of the Si substrate.

If the nitrogen concentration has a peak at a point adjacent the interface with the Si
15 substrate, in particular, the probability is high that the driving force of the transistor has been reduced by an increased nitrogen concentration in the Si substrate.

By contrast, the present embodiment allows additional introduction of high-concentration nitrogen by performing NO gas annealing with respect to the silicon oxynitride film, while providing a steeply sloped nitrogen distribution in the silicon
20 oxynitride film. As a consequence, the driving force of the transistor can be held high, while the short-channel effects are suppressed by effectively preventing boron penetration. In summary, the suppression of the short-channel effects in a p-channel MIS transistor is achievable simultaneously with an improvement in driving force.

Judging from the results of the experiments conducted by the present inventors, the
25 heat treatment temperature during the NO gas annealing is preferably higher than 800 °C and not higher than 1050 °C.

The structure of the p-channel MIS transistor is not limited to a SAC structure as

shown in Figure 2(c). However, since the stress resulting from the nitride film sidewalls 16a is exerted on the gate electrodes 13a or the like in the p-channel MIS transistor with the SAC structure shown in Figure 2(c), boron in the gate electrodes 13a is particularly likely to enter the Si substrate 10. By applying the present invention to the p-channel
5 MIS transistor with the SAC structure, therefore, a structure particularly suitable for miniaturization is obtained.

(Other Embodiments)

Although the foregoing embodiment has performed annealing while keeping the surface of the silicon nitride film in contact with the NO gas (NO gas annealing), effects
10 equal to those achieved in the foregoing embodiment are also achievable by performing annealing while keeping a silicon oxynitride film in contact with another gas containing oxygen and nitrogen, such as an N₂O gas or NO₂ gas.

Although the foregoing embodiment has described the annealing process in the case of using the silicon oxynitride film as a gate insulating film provided under the gate
15 electrode of the MIS transistor, the present invention is not limited to such an embodiment and is also applicable to a device such as a MIS capacitor or a TFT transistor.

The present invention is also applicable to a MIS transistor or MIS capacitor using a SOI substrate.

[Effects of the Invention]

20 In accordance with a method of fabricating a semiconductor device of the present invention, in process steps for fabricating an MIS transistor, a silicon oxynitride film is formed, a heat treatment is then performed with a surface of the silicon oxynitride film kept in contact with a gas containing nitrogen, and a semiconductor film is formed on the heat-treated silicon oxynitride film. Therefore, a more steeply sloped concentration
25 profile and a higher concentration of nitrogen in the silicon oxynitride film can suppress the entrance of nitrogen into the semiconductor film and the substrate. For example, the suppression of the short-channel effects resulting from the penetration of the impurity into

the gate electrode of the p-channel MIS transistor is achievable simultaneously with an improvement in the driving force of the transistor.

[Brief Description of the Drawings]

[Figure 1]

5 Figures 1(a) to (e) are cross-sectional views illustrating the first half steps of the process of fabricating a semiconductor device according to an embodiment of the present invention.

[Figure 2]

10 Figures 2(a) to (c) are cross-sectional views illustrating the second half steps of the process of fabricating a semiconductor device according to the embodiment of the present invention.

[Figure 3]

Figures 3 show respective short-channel characteristics in a conventional p-channel MIS transistor and in a p-channel MIS transistor according to the present embodiment.

15 [Figure 4]

Figures 4 show respective Ion-Ioff characteristics in the conventional p-channel MIS transistor and in the p-channel MIS transistor according to the present embodiment.

[Figure 5]

20 Figure 5 shows respective subthreshold characteristics in the conventional p-channel MIS transistor and in the p-channel MIS transistor according to the present embodiment.

[Figure 6]

Figure 6 shows respective transconductance characteristics in the conventional p-channel MIS transistor and in the p-channel MIS transistor according to the present embodiment.

25 [Figure 7]

Figure 7 shows, on a logarithmic scale, the results of measuring, by SIMS, the distributions of nitrogen concentration in silicon oxynitride films and their vicinities

according to Example and Comparative Examples.

[Figure 8]

Figure 8 shows, on a linear scale, the results of measuring, by SIMS, the distributions of nitrogen concentration in the silicon oxynitride films and their vicinities

5 according to Example and Comparative Examples.

[Explanation of Reference Numerals]

10 Si substrate

11 trench isolation regions

12 silicon oxynitride film

10 **12a, 12b** gate dielectrics

13 amorphous silicon film

13a, 13b gate electrodes

14a, 14b on-gate protective layers

15 silicon oxide film

15 **15a, 15b** oxide film sidewalls

16 silicon nitride film

16a, 16b nitride film sidewalls

[Name of the Document] ABSTRACT

[Summary]


[Purpose] There is provided a method of fabricating a semiconductor device such as a p-channel MIS transistor with no boron penetration into a gate electrode and with a high driving force.

[Solution] A silicon oxynitride film **12** is formed on a Si substrate **10**. Then, annealing is performed with the silicon oxynitride film **12** kept in contact with an NO gas to introduce nitrogen into the silicon oxynitride film **12** to have a high concentration and exhibit a steeply sloped concentration profile in the film. An amorphous silicon film **13** is deposited on the silicon oxynitride film **12**, and impurity ions for forming a dual gate structure are then implanted into the amorphous silicon film **13**. Thereafter, a CMOS device is formed which comprises p-type and n-type MIS transistors having the silicon oxynitride film **12** as a gate oxide film and a polysilicon film as a gate electrode. NO gas annealing causes the distribution profile of nitride contained in the silicon oxynitride film **12** to be steeply sloped. Thereby, a high driving force is provided, while boron penetration in the p-type MIS transistor is suppressed.



[Selected Figure] Figure 1

【書類名】 図面 [Name of the Document] DRAWINGS

【図1】 [Figure 1]

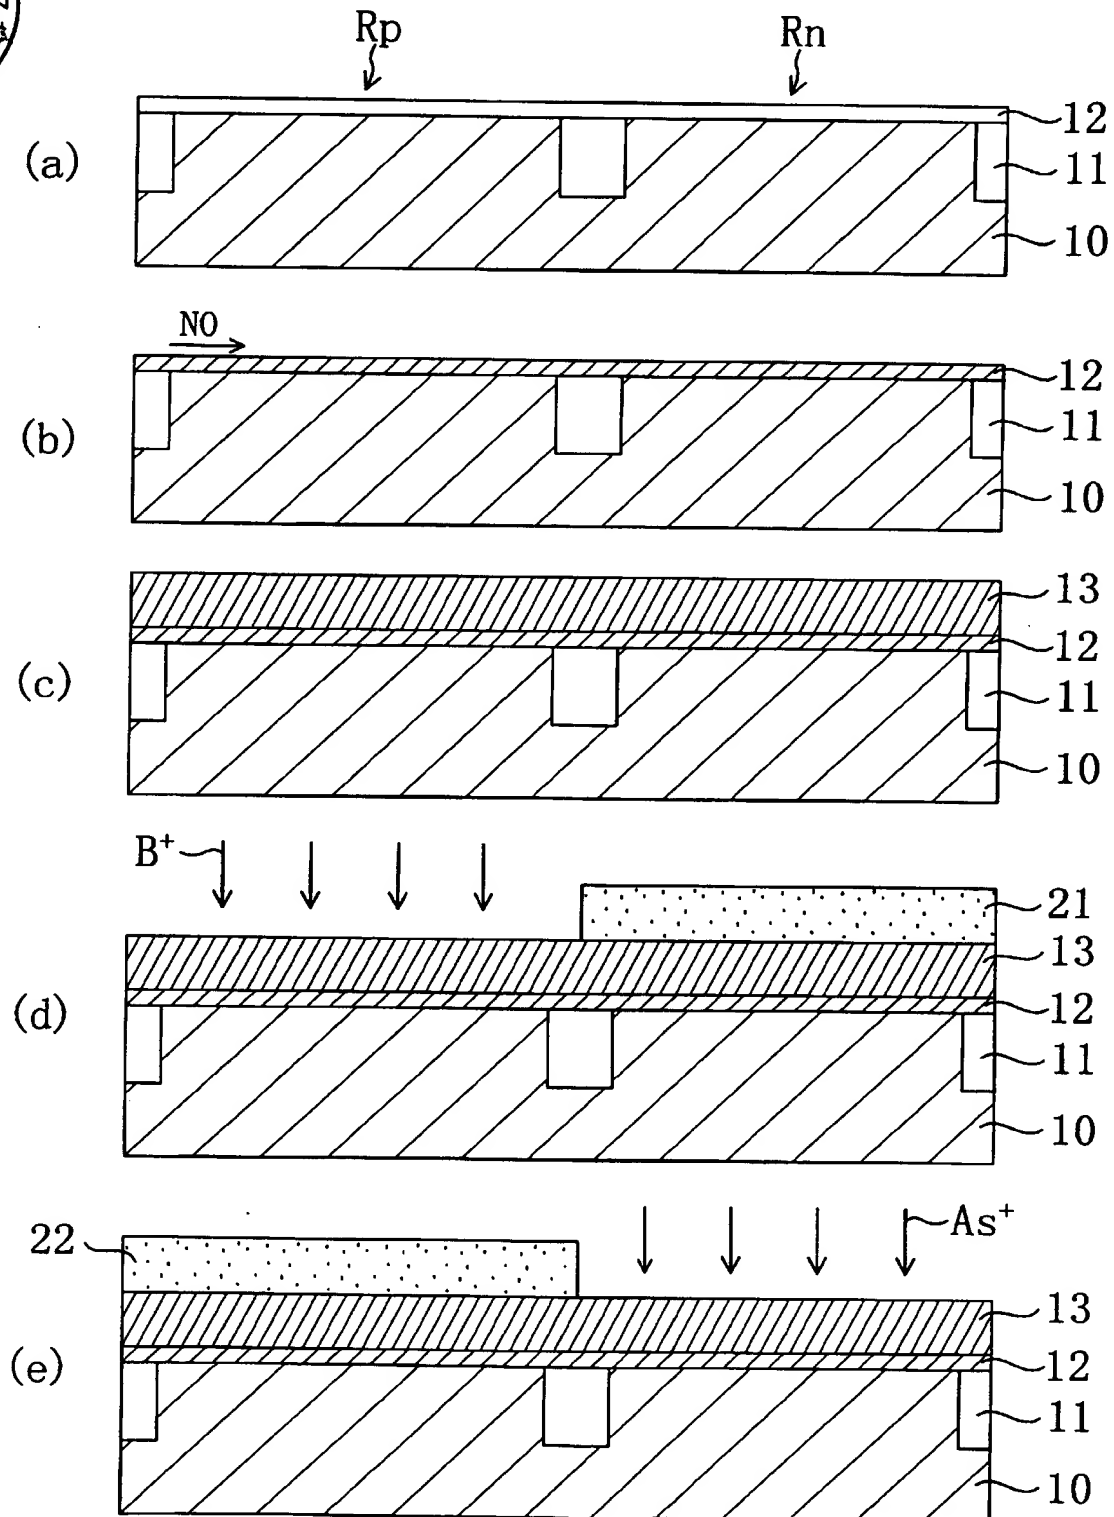


【図2】 [Figure 2]

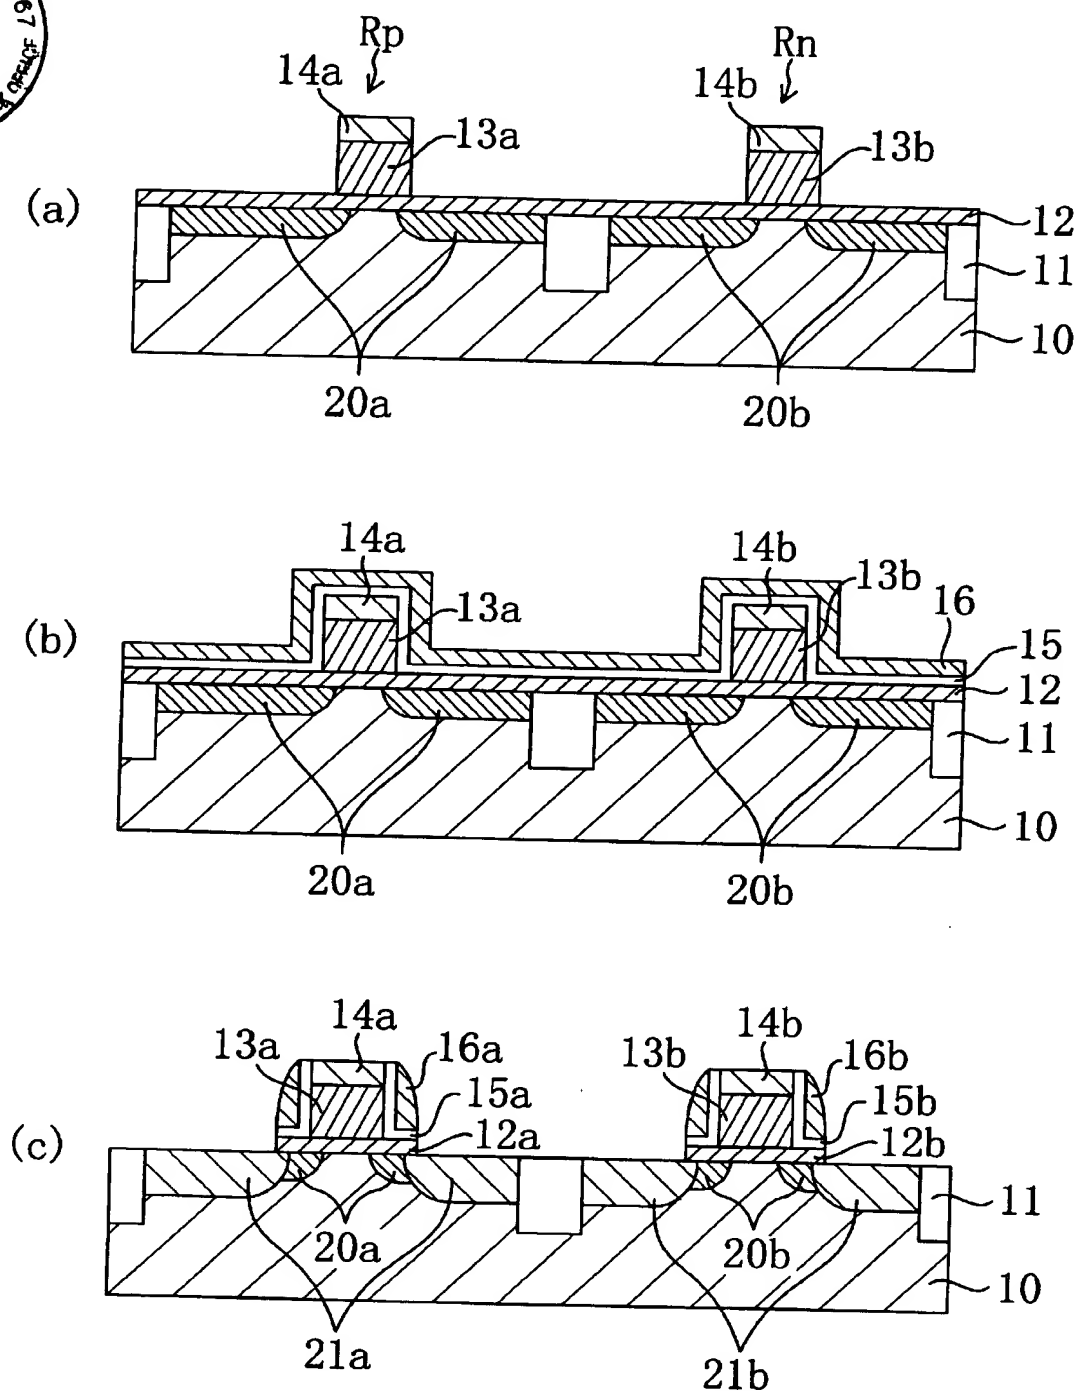


【図3】 [Figure 3]



(a)

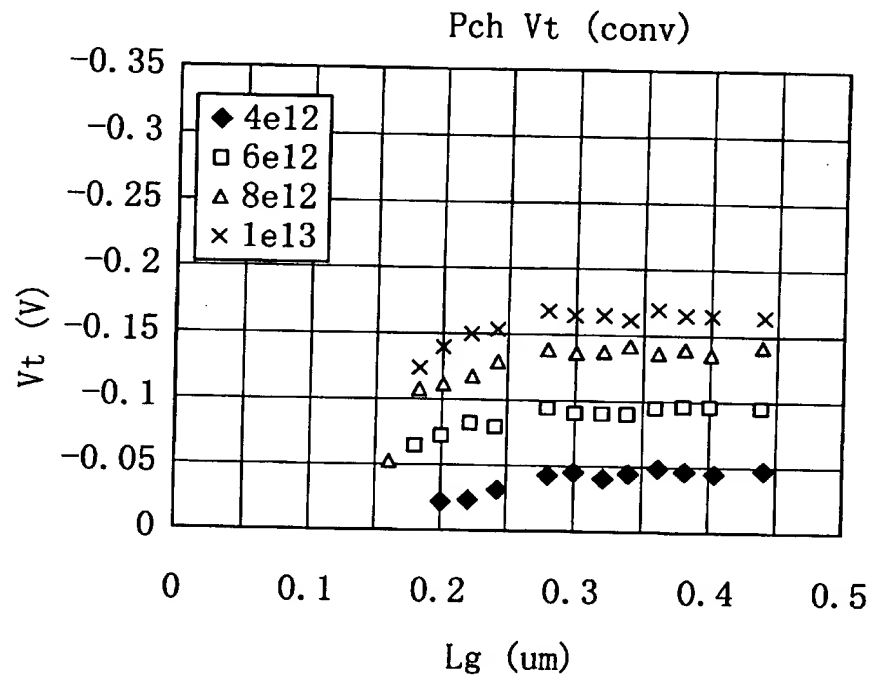


(b)

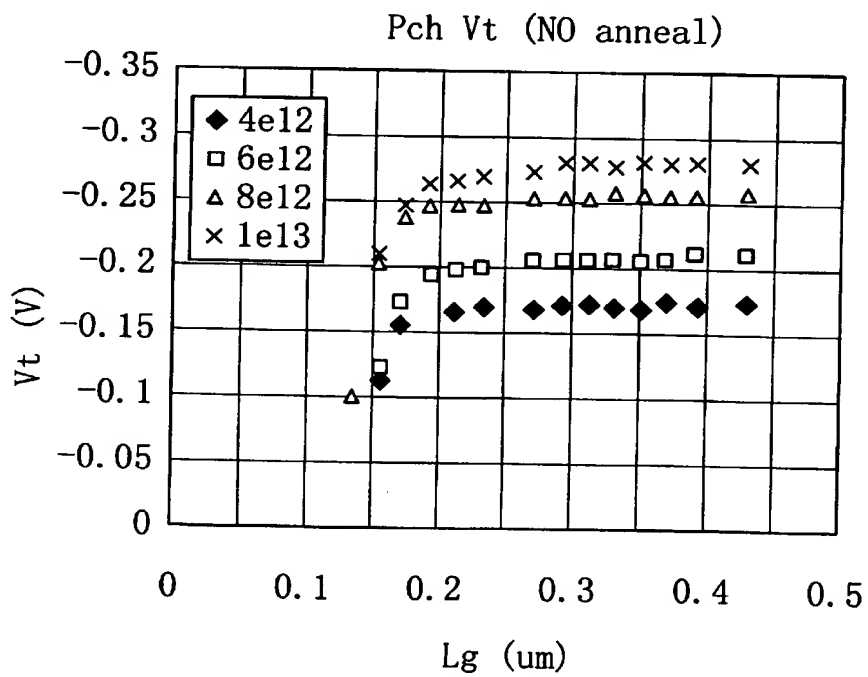


【図4】 [Figure 4]




(a)

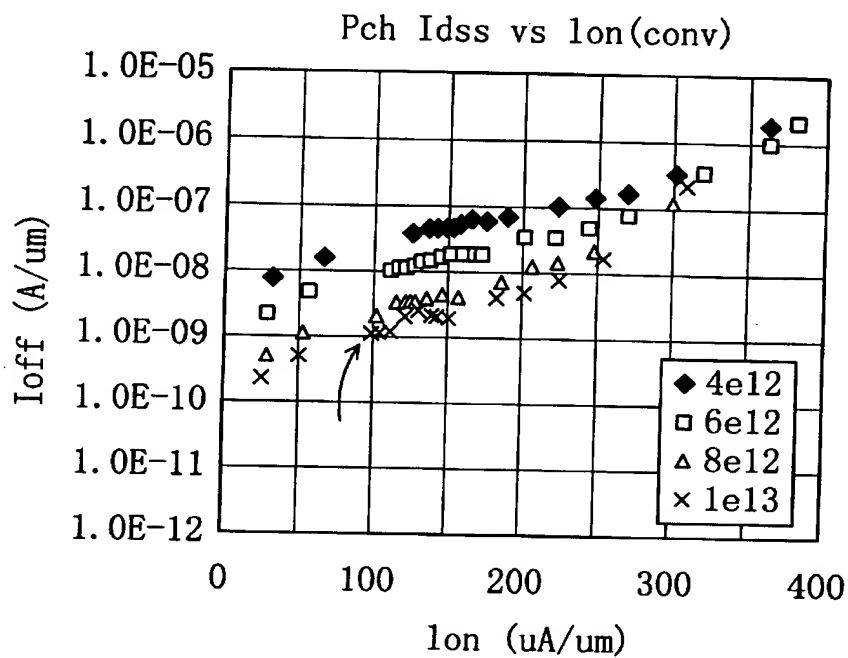


(b)

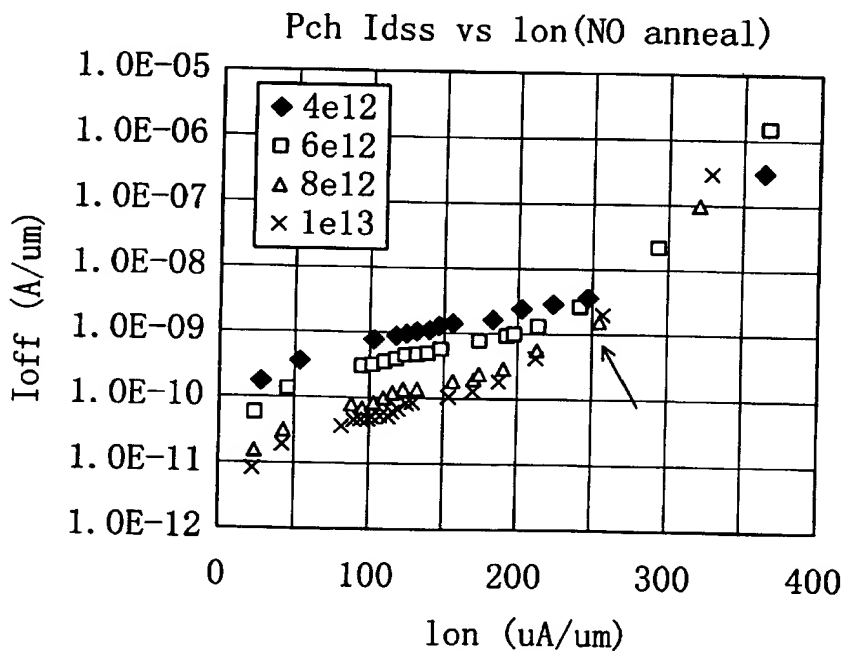


【図5】 [Figure 5]

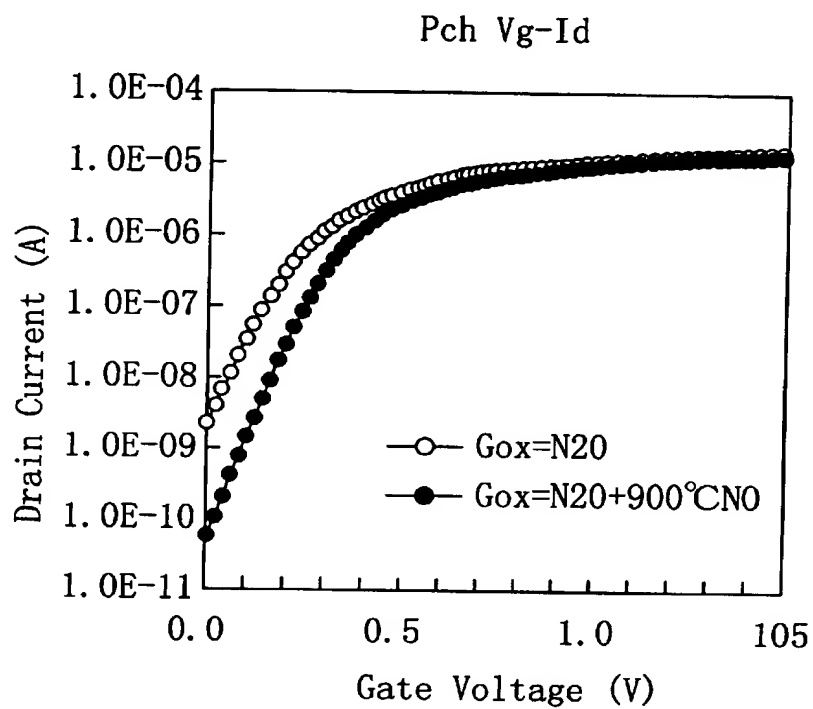

【図6】 [Figure 6]

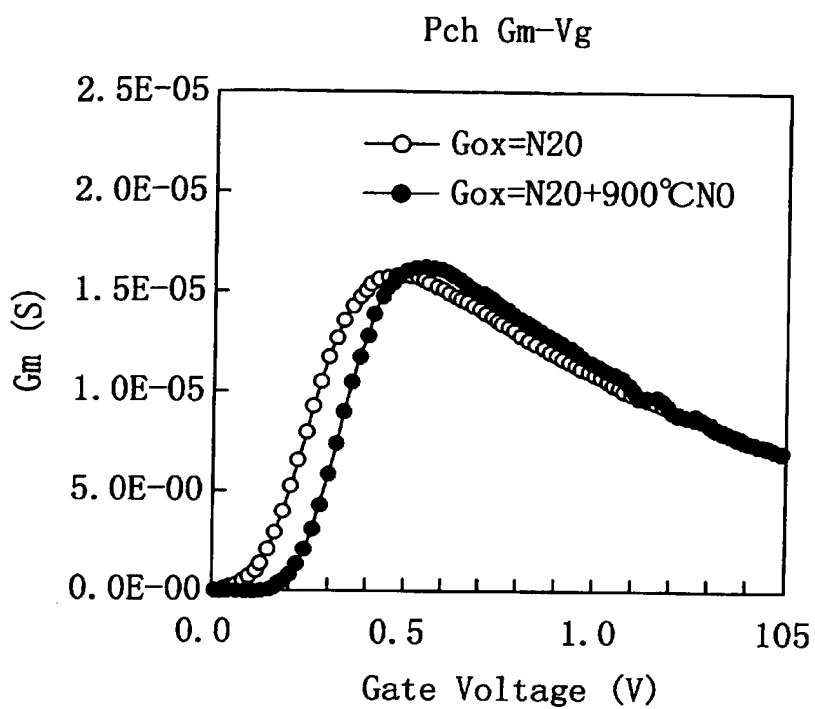

【図7】 [Figure 7]

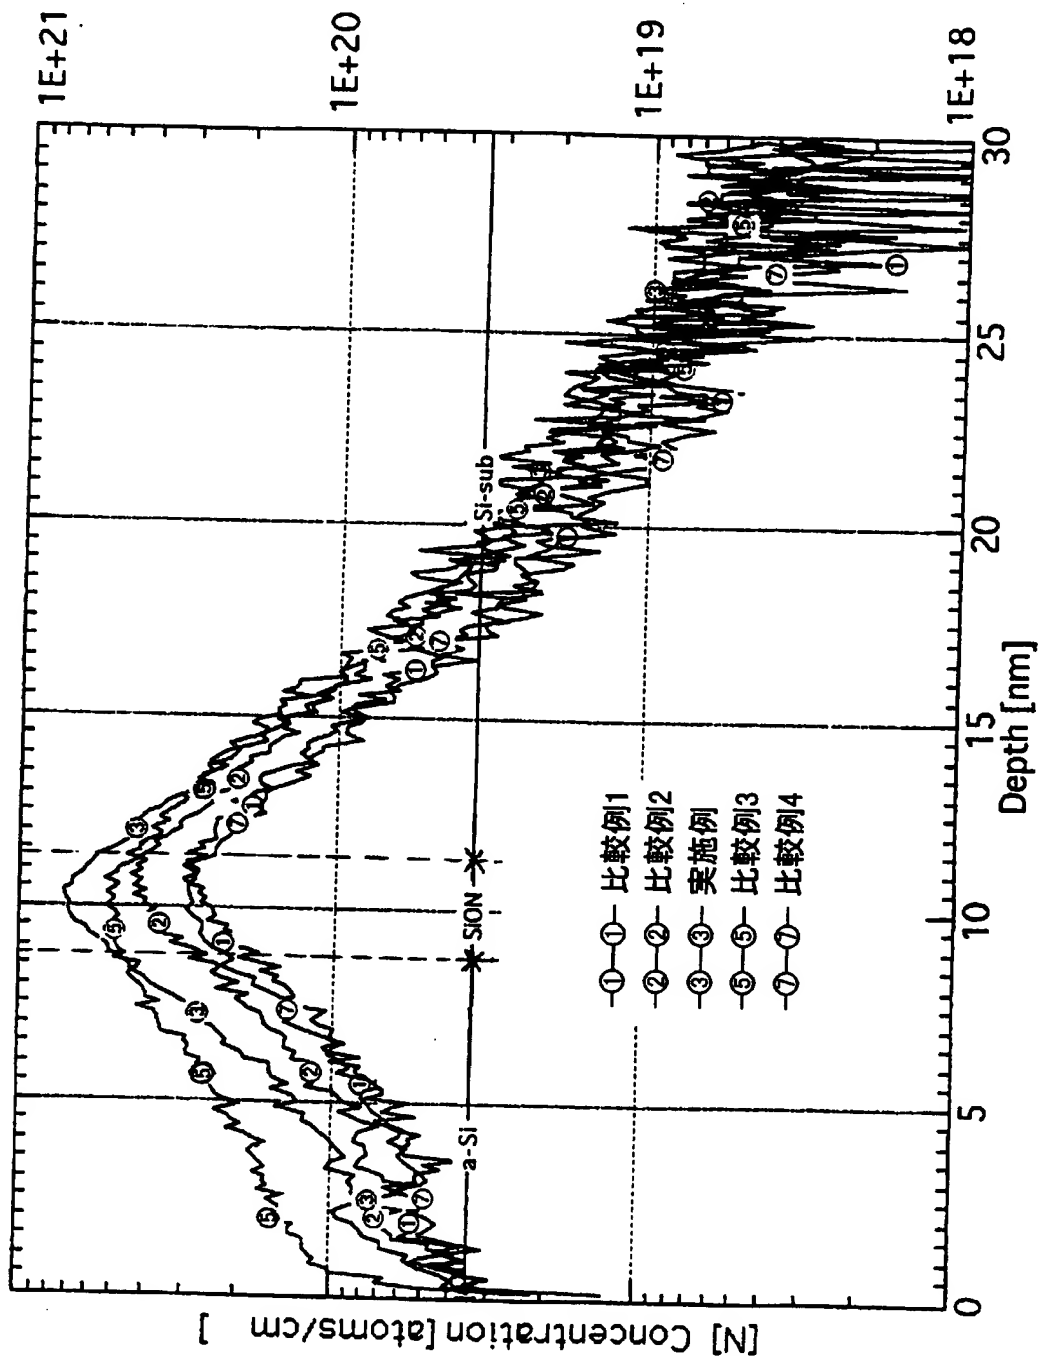

比較例 → Comparative Example
実施例 → Example



【図8】 [Figure 8]

